Indoor fixed installation

IF3 Series







Ultra high definition



Light weight



Flexible assembly



Right angle splicing



Cable connection



Pre maintenance




Quick installation



High gray high brush

Cabinet size

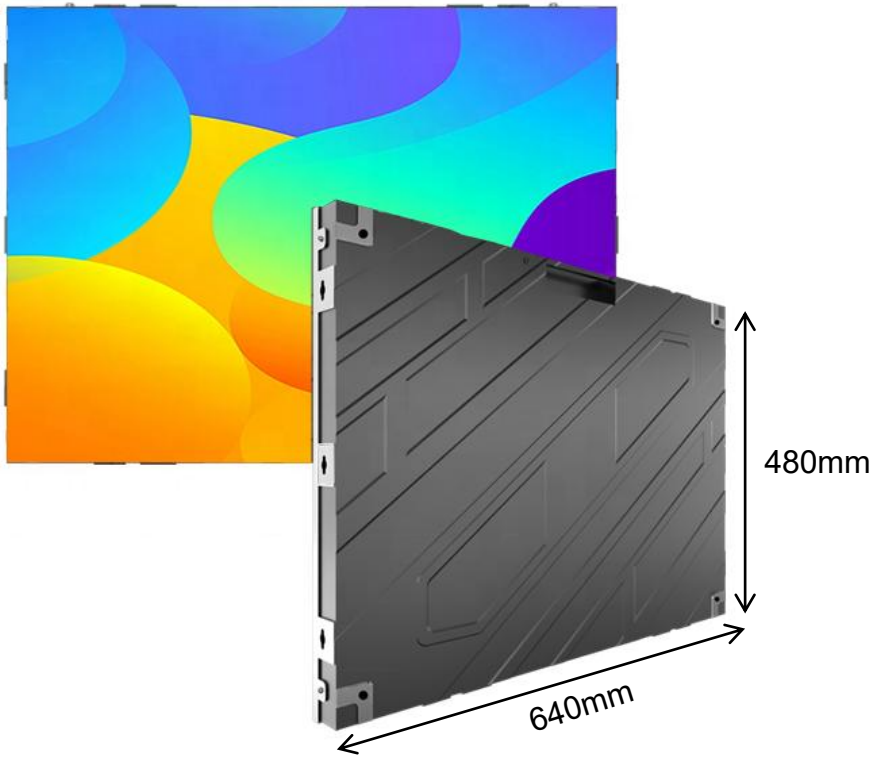

Cabinet weight

Die cast aluminum integrated box body, high precision, with a total thickness of 48mm,

The weight of each panel 640 x 480mm is 6kg/pcs






48mm


Front maintenance

Module is front service with magnets attach on the panel, easy maintenance

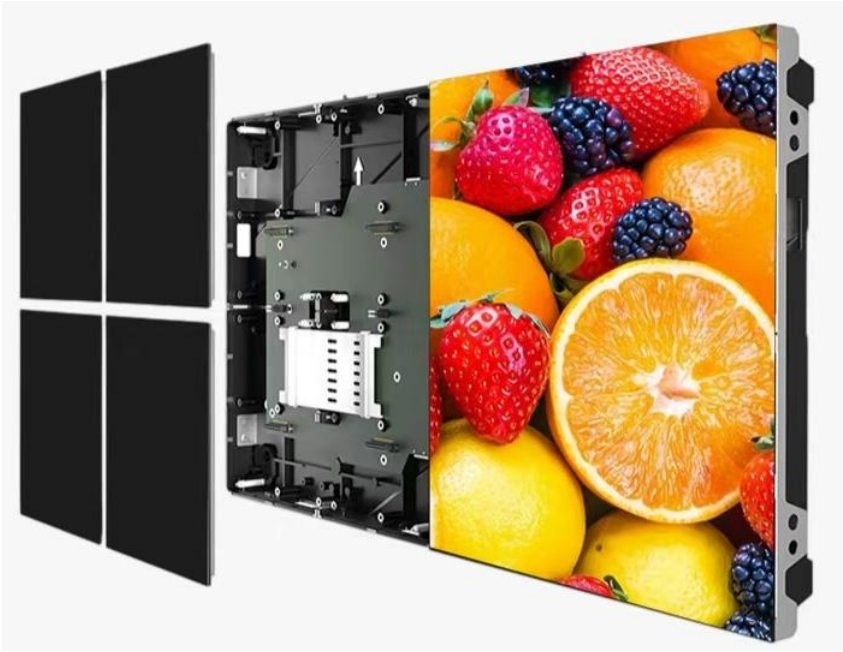

Module size




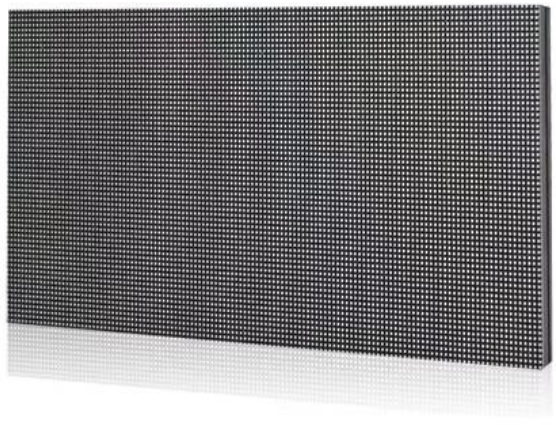

The module fix on the cabinet size is 320 x 160mm, can be


P1.25, P1.53, P1.86, P2, P2.5, P3.076 etc

Inside connection

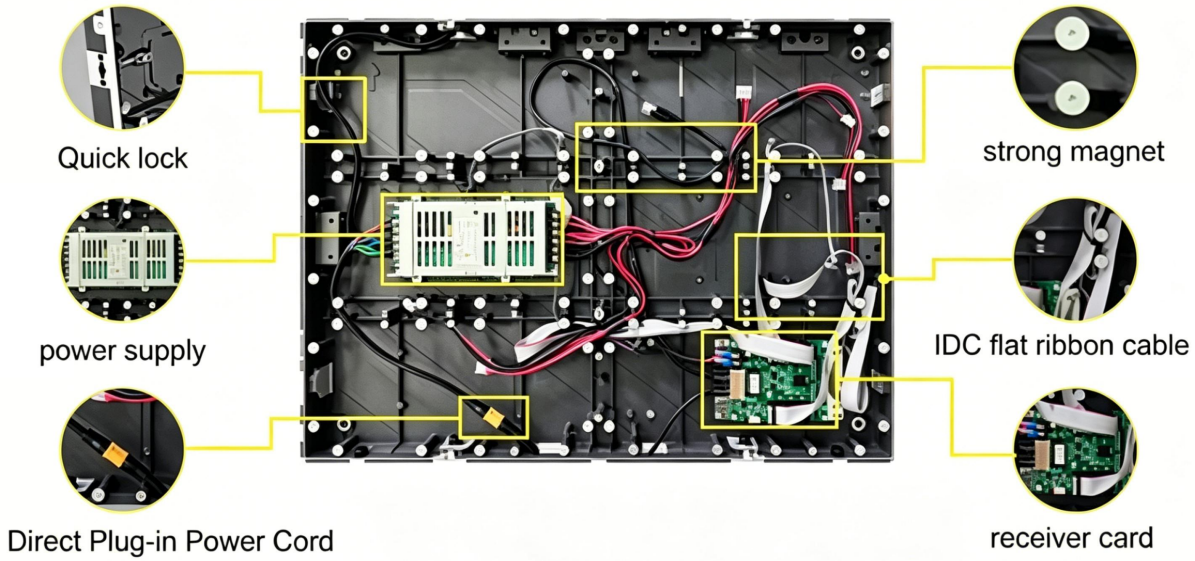


Free splicing, multiple sizes

Seamless splicing, multiple sizes (640 x 480mm, 640 x 640mm, 320 x 480mm, 960 x 480mm etc) can connect together to meet screen project sizes better.

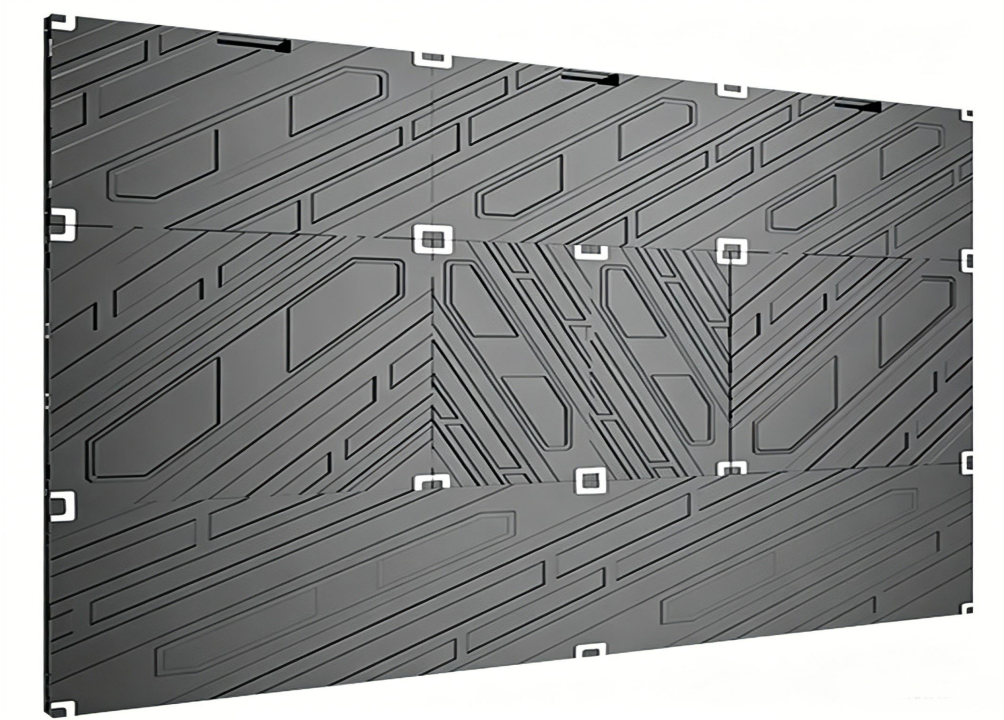

High brightness and high gray

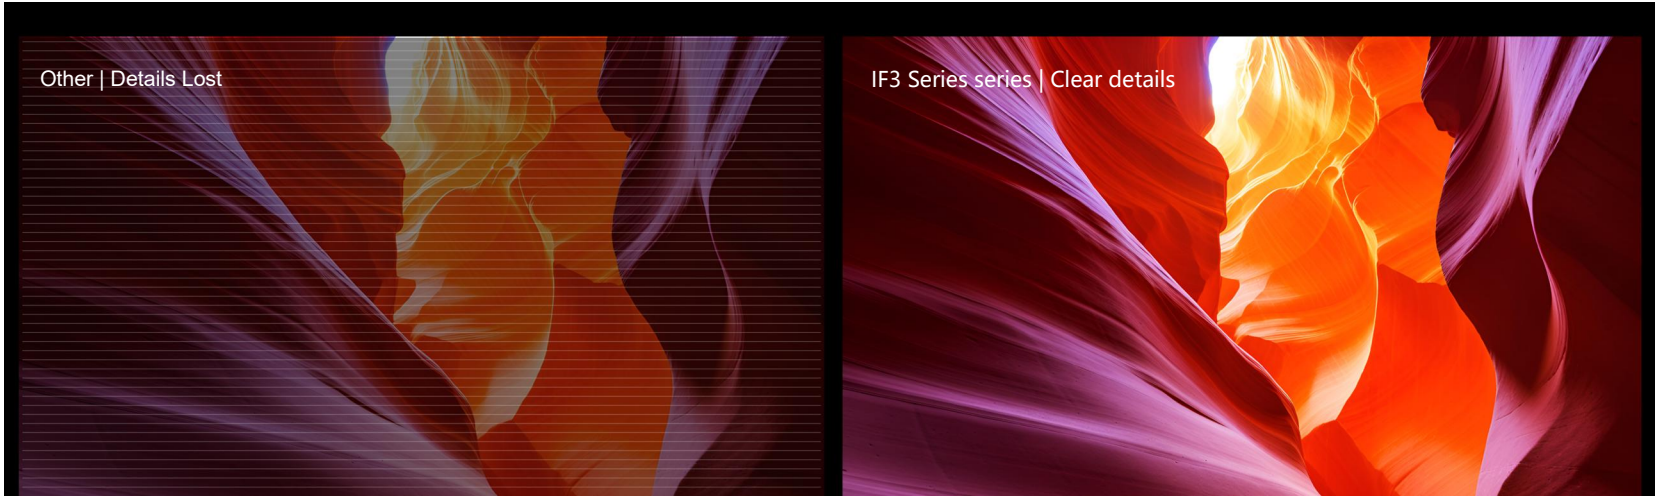

Installation method



Hanging



Wall mounting



Variety of shapes

Applications





Specifictions

Pixel pitch	P1.25	P1.53	P1.86	P2.5
LED Type	SMD1010	SMD1515	SMD1515	SMD2121
Module size	320 x 160mm	320 x 160mm	320 x 160mm	320 x 160mm
Scan mode	1/52	1/52	1/43	1/32
Cabinet size	640 x 480mm	640 x 480mm	640 x 480mm	640 x 480mm
Cabinet resolution	512 x 384	418 x 313	344 x 258	256 x 192
Brightness/nits	600	700	700	800
Refresh rate/hz	3840	3840	3840	3840
Protection level	IP31	IP31	IP31	IP31
Power consumption	180W/600W	180W/600W	180W/600W	180W/600W
Working temperature	-20~60℃	-20~60℃	-20~60℃	-20~60℃
Gray level	14/16bits	14/16bits	14/16bits	14/16bits
Color temperature	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Control system	Novastar/Linsn/Colorlight/Huidu			
Warranty	3 years	3 years	3 years	3 years

THANKS